



Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

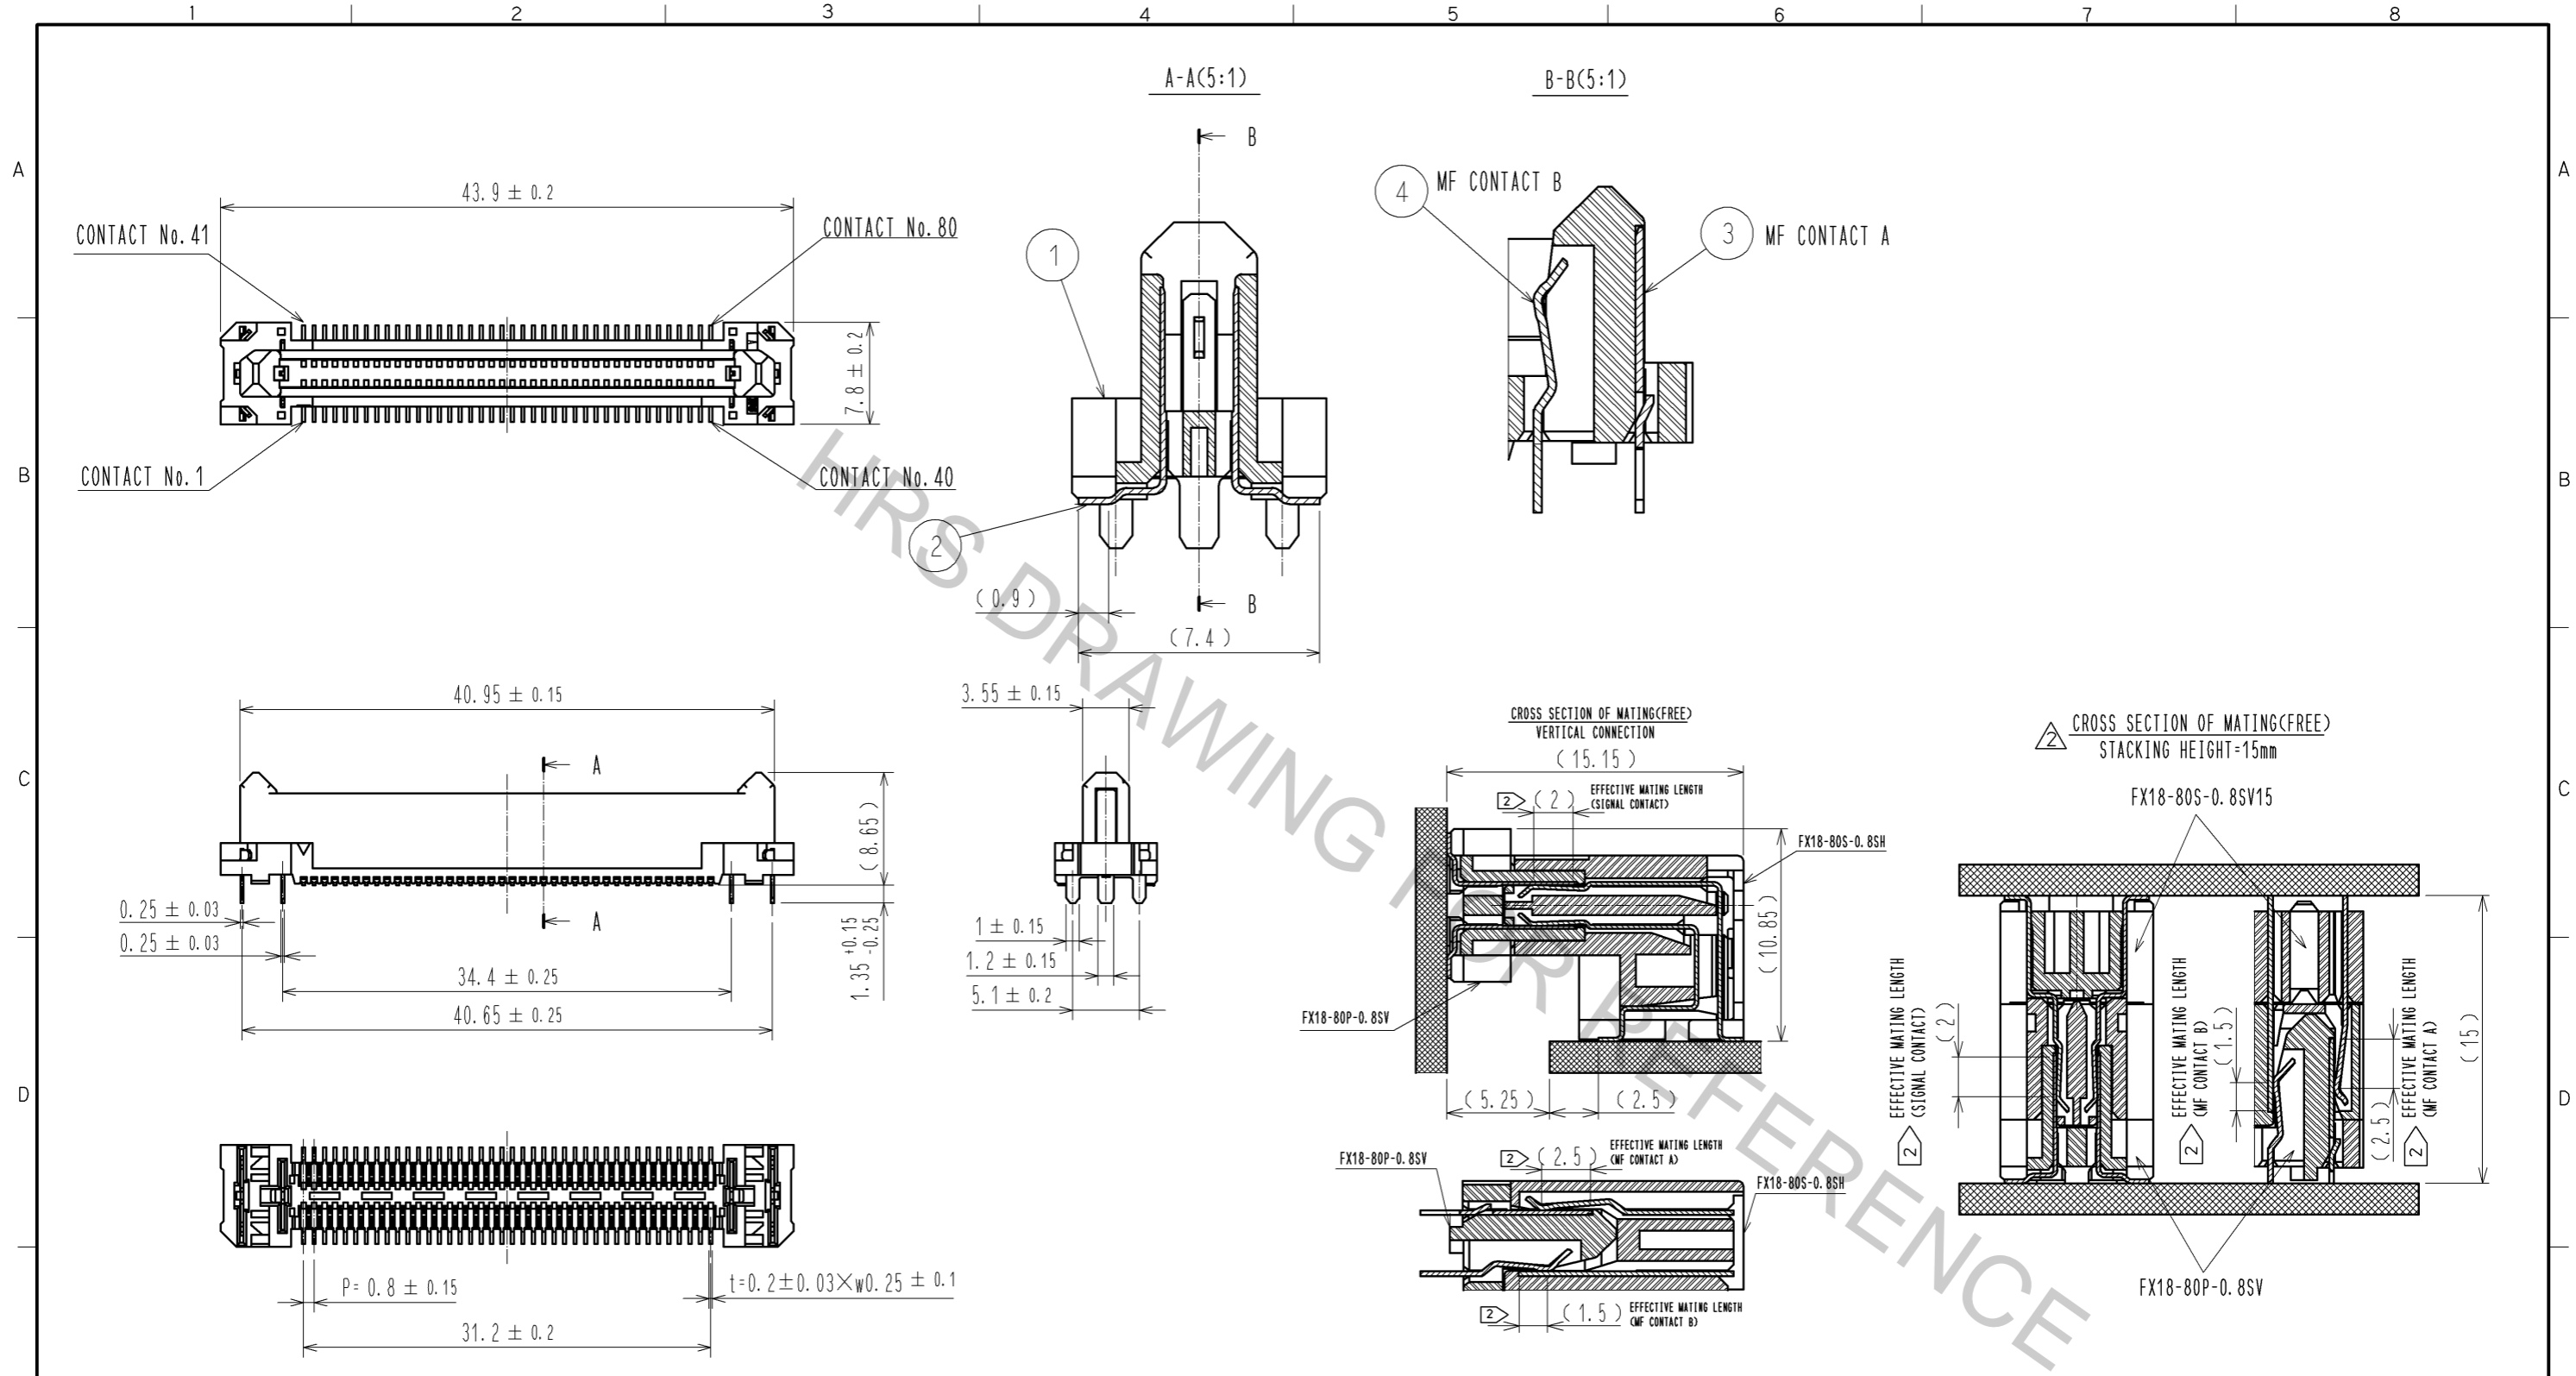

NOTE 1 LEAD CO-PLANARITY IS 0.1mm MAX.
 ② CONTACTS ARE 3 STEPS SEQUENTIAL. (MF CONTACT A=>SIGNAL CONTACT=>MF CONTACT B)
 WHEN USING THIS SEQUENTIAL STRUCTURE, PLEASE AVOID ANGLED INSERTION.
 3 MF CONTACT A AND MF CONTACT B CAN BE USED AS POWER SUPPLY CONTACT. (3A/PIN MAX)
 ④ IT SHOWS THE VACUUM PICKUP AREA. (SEE PAGE 2)
 REMOVE THE MYLAR TAPE BEFORE MATING CONNECTORS.
 ⑤ THIS IS PACKAGED IN TRAY. (50pcs/TRAY)
 6 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN' T AFFECT QUALITY LEVEL.
 7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCES.

3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1 μm					
		LEAD AREA:TIN-PLATING 1 μm					
2	PHOSPHOR BRONZE	UNDER PLATING:NICKEL 1.3 μm	6	POLYIMIDE			
		CONTACT AREA:GOLD 0.1 μm	5	POLYSTYRENE			
1	POLYAMIDE	LEAD AREA:GOLD 0.03 μm	4	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1 μm		
		UNDER PLATING:NICKEL 1.3 μm			LEAD AREA:TIN-PLATING 1 μm		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-005993	DESIGNED TH. SANO	CHECKED KI. HIROKAWA	DATE 12. 01. 27
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	10. 06. 16	DRAWING NO.	EDC3-159562-00		
		CHECKED : KI. HIROKAWA	10. 06. 16	PART NO.	FX18-80P-0. 8SV		
		DESIGNED : TH. SANO	10. 06. 16	CODE NO.	CL579-0018-5-00		
		DRAWN : TH. SANO	10. 06. 16				

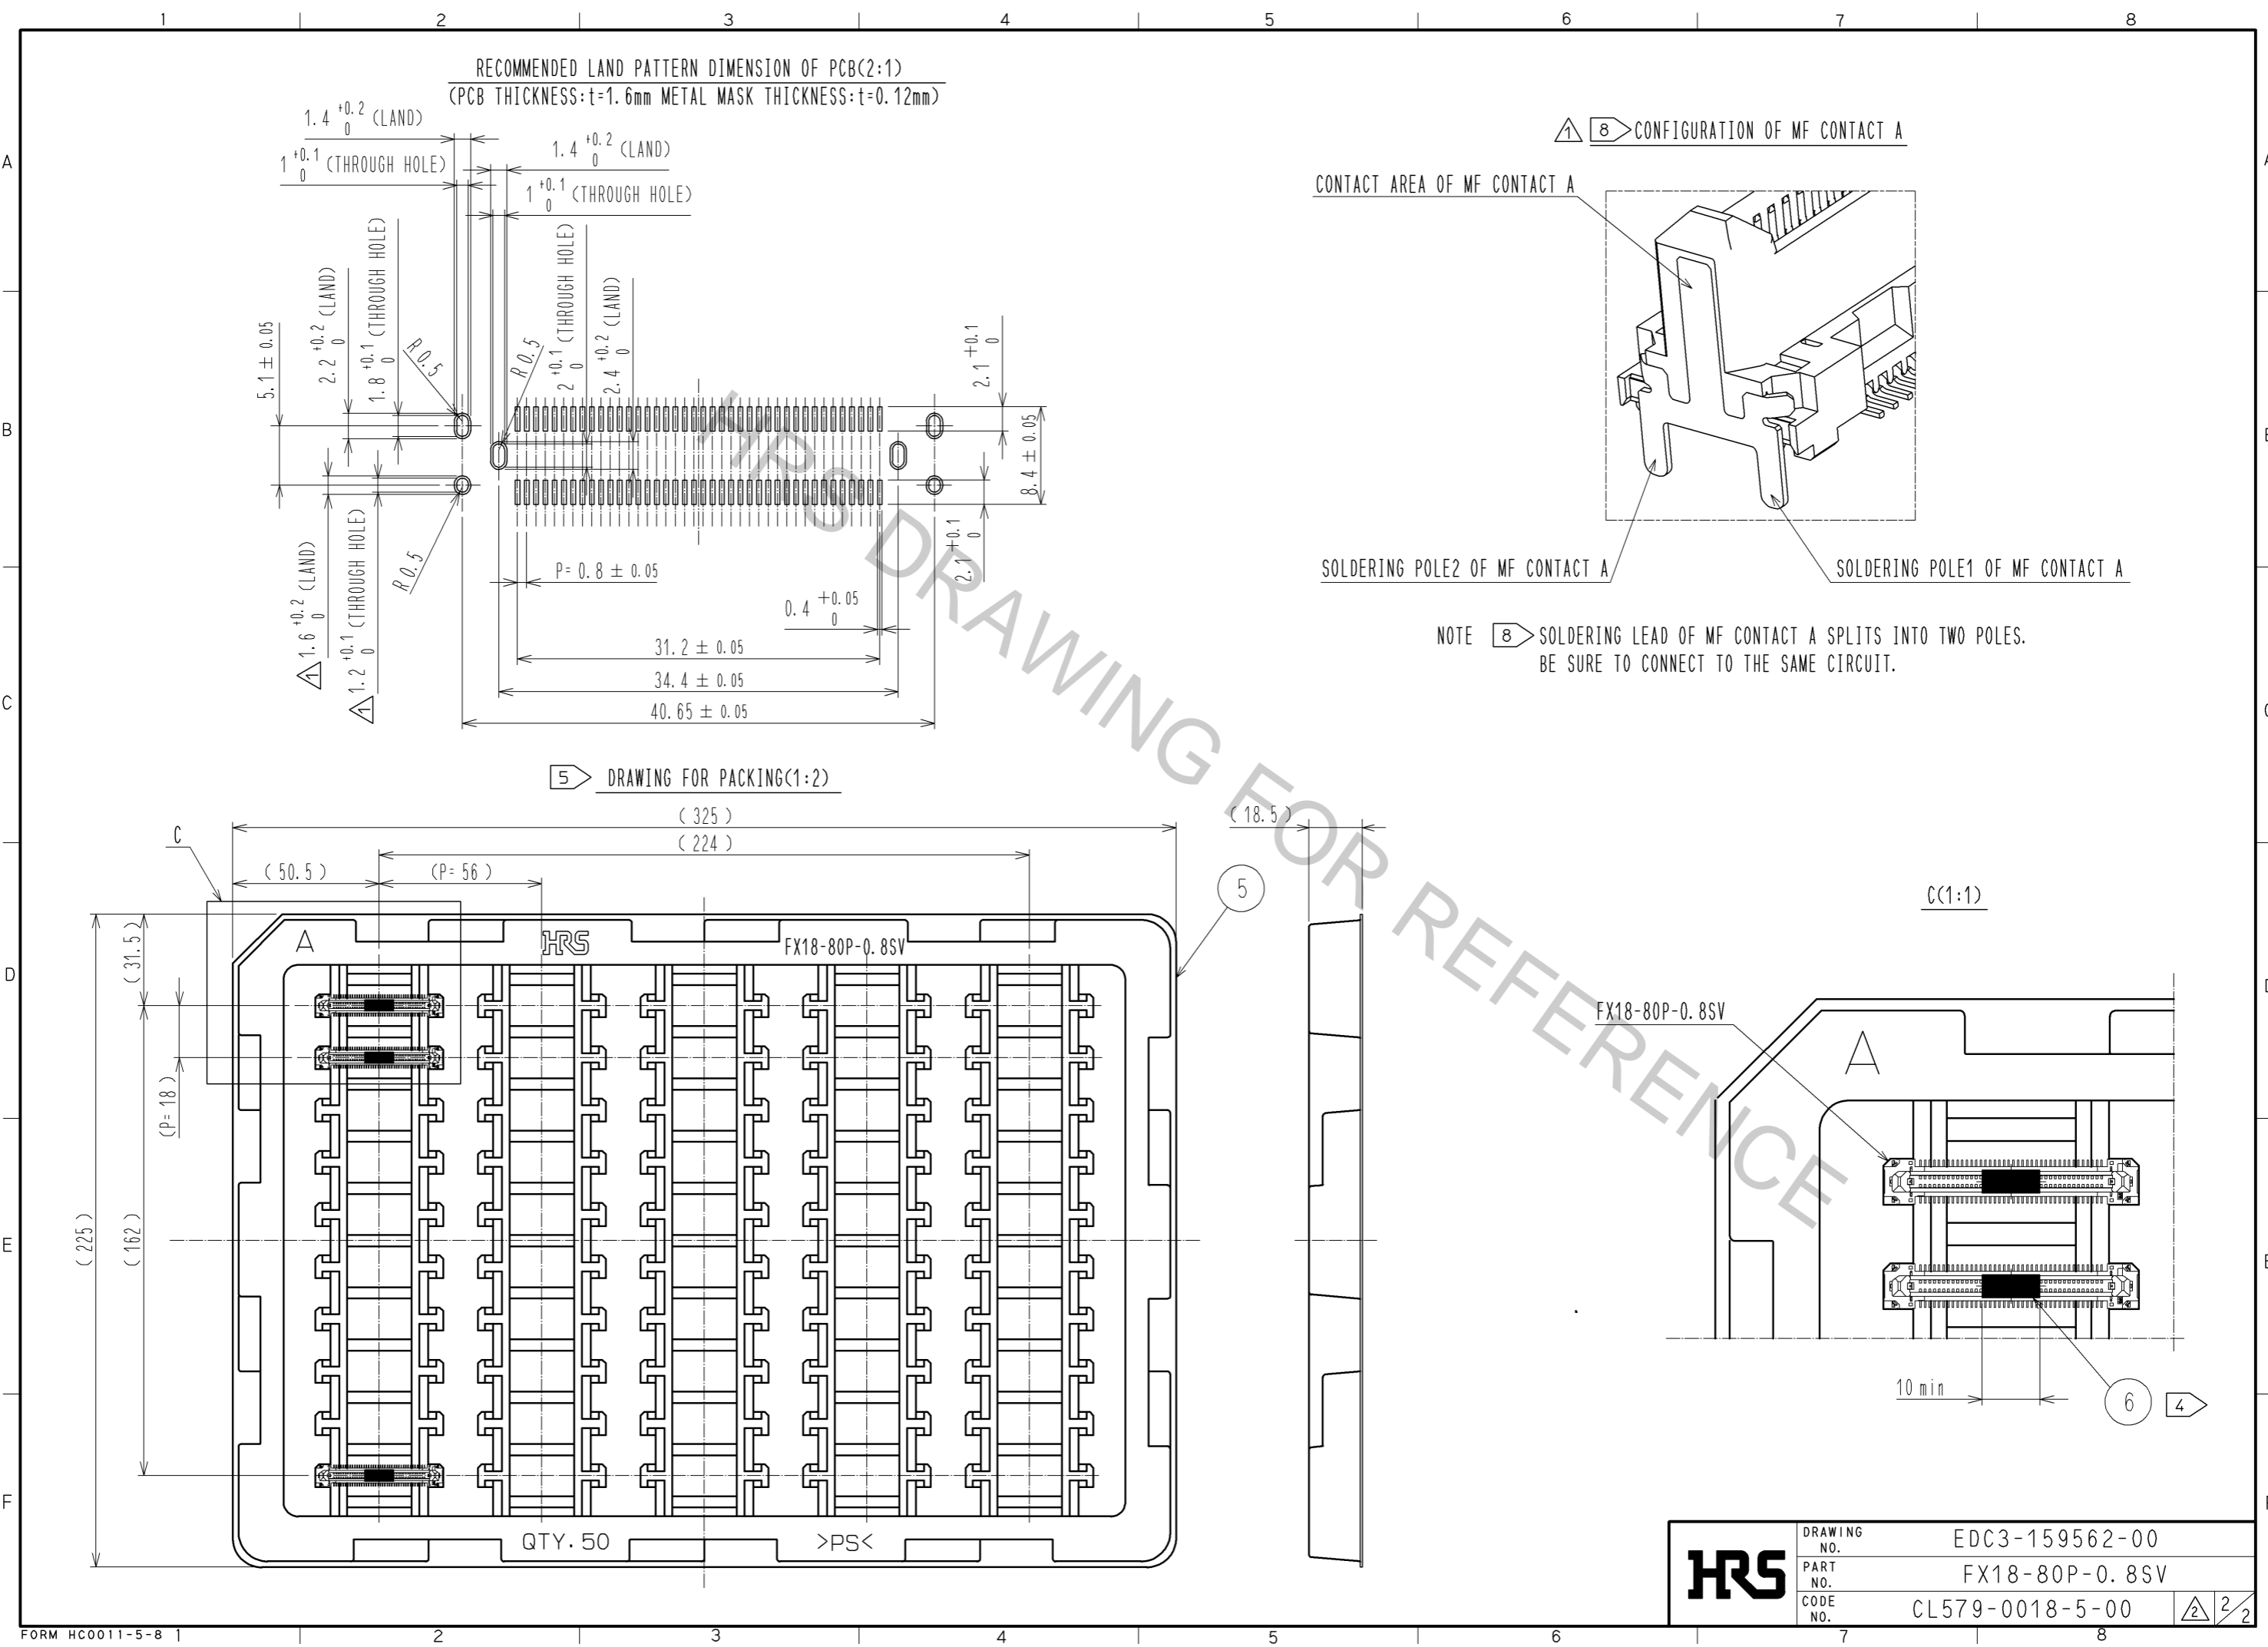

HRS	DRAWING NO.	EDC3-159562-00	2/2
	PART NO.	FX18-80P-0.8SV	
	CODE NO.	CL579-0018-5-00	