

AIR CONDITIONING & REFRIGERATION

Background

AC and refrigeration systems require precise and reliable pressure control to ensure safe, reliable, and efficient operation. As AC and refrigeration equipment utilizes compression and evaporation of refrigerants to produce a cooling effect, therefore it is critical that the refrigerant pressures in these system are managed carefully to ensure the equipment operates properly and will not become unsafe due to excessive pressures. New AC and refrigeration systems also manage pressure with pressure sensors and variable speed compressors to ensure the highest possible energy efficiency.

Solution

For decades, Sensata has been a leading provider of pressure sensing solutions used in AC and refrigeration systems. The PS80 is a UL listed automatic reset pressure switch that provides electro-mechanical pressure control for both low pressure and high pressure control in refrigerant loops. The PS80 is available in a wide range of pressure settings and configurations which can be used with a wide range of refrigerants. The 2CP5 is a device designed for today's most efficient AC and Refrigeration equipment that use pressure sensing, electronic controls, and variable speed compressors to precisely manage the refrigerant pressure for lower power consumption, quieter operation and more pressure temperature control. Both the PS80 and 2CP5 are ideal for demanding applications where long-term reliability and accuracy is critical.

New AC and refrigeration systems manage pressure with pressure sensors to ensure the highest possible energy efficiency







Commercial Fridge & Freezer



Rooftop AC System




RELATED PRODUCTS

Reference on Diagram	Product	Features	Function	Technology	Operating Range
1	 2CP5	<ul style="list-style-type: none"> UL recognized Low cost 	Pressure Sensor	Ceramic capacitive	0-15 to 0-750 psi
2	 2HMP	<ul style="list-style-type: none"> Hermetic 1% accuracy 	Pressure Sensor	MEMS	0-100 to 0-750 psi
3	 PS80	<ul style="list-style-type: none"> UL recognized automatic reset 	Pressure Switch	Klixon (snap-acting switch)	0-750 psi
4	 3NT	<ul style="list-style-type: none"> Dry seal (ideal for condensing environments) 	Thermostat	Klixon (snap-acting switch)	-20 to 135°C



GENERAL REFRIGERATION CYCLE DIAGRAM

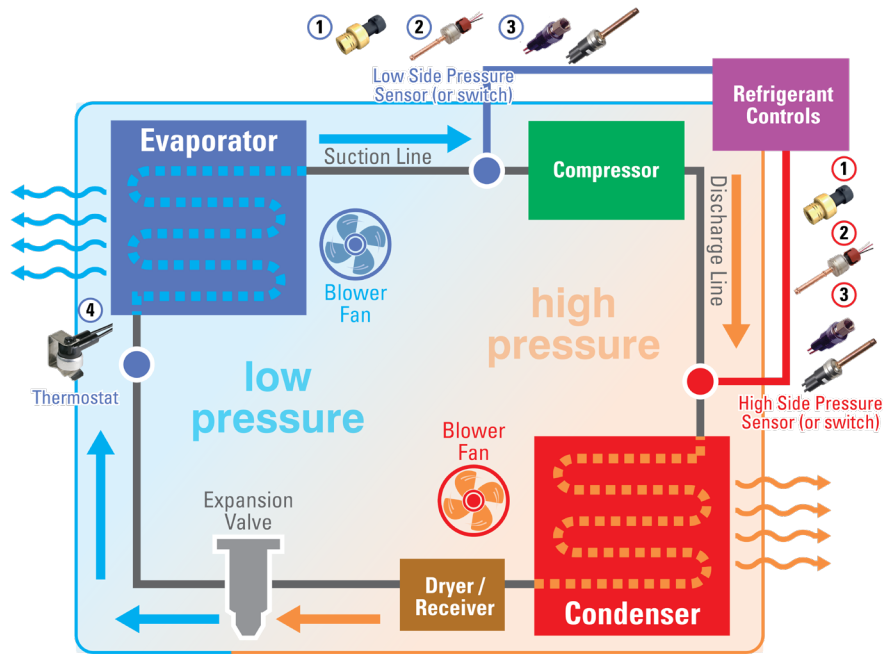

Sensata Technologies, Inc. ("Sensata") data sheets and application notes are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets and application notes have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet and application notes. Sensata may make corrections, enhancements, improvements and other changes to its data sheets and application notes or components without notice.

Buyers are authorized to use Sensata data sheets and application notes with the Sensata component(s) identified in each particular data sheet and application notes. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS AND APPLICATION NOTES ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS AND APPLICATION NOTES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS AND APPLICATION NOTES OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

+1 (877) 350 2727
 sensors@sensata.com
 switches@sensata.com

Europe, Middle East & Africa

+359 (2) 809 1826
 pressure-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com
 China +86 (21) 2306 1500
 Japan +81 (45) 277 7117
 Korea +82 (31) 601 2004
 India +91 (80) 67920890
 Rest of Asia +886 (2) 27602006 ext 2808