



A Dimensions: [mm]












Component Marking:

Reference on drawing	Description				
•	Start of winding				
Marking	3R5 (Inductance Code)				

B Recommended land pattern: [mm]



no vias and traces in restricted area

Scale - 2:1

D Electrical Properties:

Properties	Test conditions		Value	Unit	Tol.
Inductance	1 kHz/ 250 mV	L	3.5	μΗ	+40%/-20%
Rated current	∆T = 40 K	I _R	8.9	А	max.
Saturation current	∆L/L < 10%	I _{sat}	9.6	А	typ.
DC Resistance	@ 20°C	R _{DC}	0.011	Ω	typ.
DC Resistance	@ 20°C	R _{DC}	0.014	Ω	max.
Self resonant frequency		f _{res}	37.5	MHz	typ.

C Schematic:



E General information:

It is recommended that the temperature of the part does not exceed 125°C under worst case operating conditions.

- •Ambient temperature: -40°C to +85°C (refering to I_R)
- •Operating temperature: -40°C to +125°C
- •Storage temperature (on tape & reel): -20°C to +40°C; 75% RH max.

WE-PD SMD Shielded Power Inductor

•Test conditions of Electrical Properties: 20°C, 33% RH if not specified differently

5.6	2015-05-18	SSt	ALa
5.5	2014-09-16	SSt	ALa
5.4	2014-06-16	SSt	SSt
5.3	2014-01-09	SSt	SSt
5.2	2013-04-25	SSt	SSt
5.1	2013-02-20	SSt	ALa
5.0	2004-10-11	MST	-
REV/	DATE	RV	CHECKED



Germany

www.we-online.com

eiSos@we-online.com

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Tel. +49 (0) 79 42 945 - 0

Order.- No.

DESCRIPTION

74477003




SIZE


A4



F1 Typical Inductance vs. Current Characteristics:

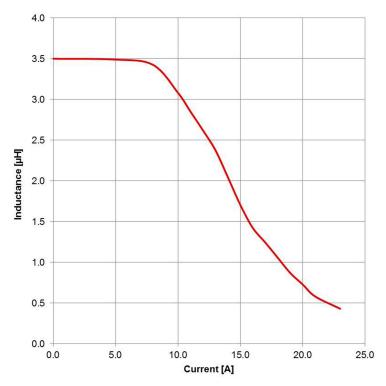


F2 Typical Impedance Characteristics:

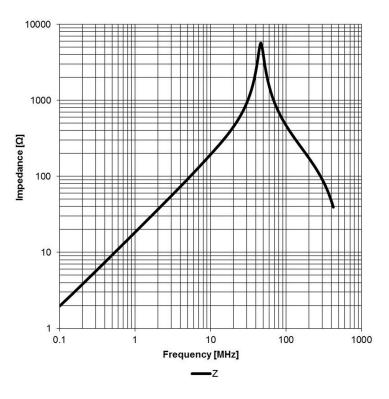


				Projection ,		DESCRIPTION					
5.6	2015-05-18	SSt	ALa								
5.5	2014-09-16	SSt	ALa	7		WE-PD SMD Shielded Power Inductor					
5.4	2014-06-16	SSt	SSt	Würth Elektronik eiSos Gmbl	H & Co. KG						
5.3	2014-01-09	SSt	SSt	EMC & Inductive Solutions Max-Eyth-Str. 1							
5.2	2013-04-25	SSt	SSt	74638 Waldenburg		Order No.	COMPLIANT	SIZF			
5.1	2013-02-20	SSt	ALa	Germany Tel. +49 (0) 79 42 945 - 0		74477000	ROHS&REACH	OIZE			
5.0	2004-10-11	MST	-	www.we-online.com eiSos@we-online.com		74477003		A4			
REV	DATE	BY	CHECKED	CIOCISSWC OHIIIC.COM		Size: 1280					


G Packaging Specification - Tape and Reel [mm]:

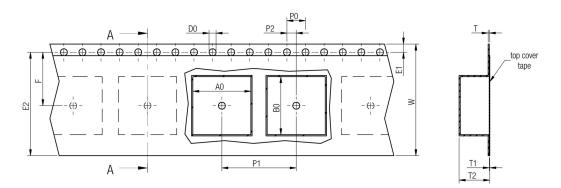


		Α0	В0	w	P1	т	T1	Т2	D0	E1	E2	F	P0	P2	Tape	VPE / packaging unit
	tolerance	typ.	typ.	+0,3 -0,1	± 0,1	± 0,1	max.	typ.	+0,3 -0,1	± 0,1	min.	± 0,05	± 0,1	± 0,05		
	1210	12,70	12,70	24,00	20,00	0,25	0,10	10,50	1,50	1,75	22,25	11,50	4,00	2,00	Polystyrene	250
size	1245	12,70	12,70	24,00	16,00	0,25	0,10	5,50	1,50	1,75	22,25	11,50	4,00	2,00	Polystyrene	500
siz	1260	12,70	12,70	24,00	16,00	0,25	0,10	6,50	1,50	1,75	22,25	11,50	4,00	2,00	Polystyrene	500
	1280	12,70	12,70	24,00	16,00	0,25	0,10	8,50	1,50	1,75	22,25	11,50	4,00	2,00	Polystyrene	500

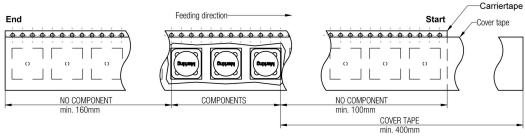


Packaging is referred to the international standard IEC 60286 -3:2007

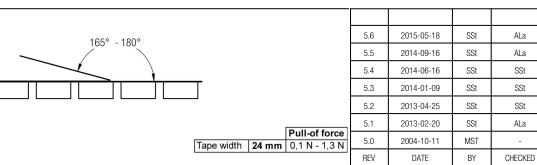





		Α	В	С	D	N	W1	W2	W3	W3
tolerance		± 2,0	min.	± 0,8	min.	min.	+ 1,5	max.	min.	max.
Tape width	24 mm	330,00	1,50	13,00	20,20	100,00	24,40	30,40	23,90	27,40





WE-PD SMD Shielded Power Inductor

Order.- No.

74477003



SIZE A4

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment only. This product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, strip control), transportation (automotive control, train control, strip control), transportation (automotive control, train control, strip control), transportation (automotive control, train control, trai the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Projection

Max-Eyth-Str. 1

Germany

74638 Waldenburg

www.we-online.com

eiSos@we-online.com

Tel. +49 (0) 79 42 945 - 0

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions

H Soldering Specifications:



H1: Classification Reflow Profile for SMT components:



H2: Classification Reflow Profiles

Profile Feature	Pb-Free Assembly
Preheat - Temperature Min (T _{smin}) - Temperature Max (T _{smax}) - Time (t _s) from (T _{smin} to T _{smax})	150°C 200°C 60-120 seconds
Ramp-up rate (T _L to T _P)	3°C/ second max.
Liquidous temperature (T_L) Time (t_L) maintained above T_L	217°C 60-150 seconds
Peak package body temperature (Tp)	See Table H3
Time within 5°C of actual peak temperature (tp)	20-30 seconds
Ramp-down rate (T _P to T _L)	6°C/ second max.
Time 25°C to peak temperature	8 minutes max.

refer to IPC/JEDEC J-STD-020D

H3: Package Classification Reflow Temperature

	Package Thickness	Volume mm³ <350	Volume mm³ 350 - 2000	Volume mm³ >2000
PB-Free Assembly	< 1.6 mm	260°C	260°C	260°C
PB-Free Assembly	1.6 - 2.5 mm	260°C	250°C	245°C
PB-Free Assembly	≥ 2.5 mm	250°C	245°C	245°C

refer to IPC/JEDEC J-STD-020D

				Projection ,		DESCRIPTION					
5.6	2015-05-18	SSt	ALa			WE-PD SMD Shielded Power Inductor					
5.5	2014-09-16	SSt	ALa	9							
5.4	2014-06-16	SSt	SSt	Würth Elektronik eiSos Gmbl	H & Co. KG						
5.3	2014-01-09	SSt	SSt	EMC & Inductive Solutions Max-Eyth-Str. 1							
5.2	2013-04-25	SSt	SSt	74638 Waldenburg		Order No.	COMPLIANT	SIZE			
5.1	2013-02-20	SSt	ALa	Germany Tel. +49 (0) 79 42 945 - 0		74477000	ROHS&REACH				
5.0	2004-10-11	MST	-	www.we-online.com eiSos@we-online.com		74477003	- IJAM ELEKTAONA	A4			
REV	DATE	BY	CHECKED	CIOOSSWC OIIIIIC.COIII		Size: 1280					

SIZE A4

I Cautions and Warnings:

The following conditions apply to all goods within the product series of WE-PD of Würth Elektronik eiSos GmbH & Co. KG:

General:

All recommendations according to the general technical specifications of the data sheet have to be complied with.

The usage and operation of the product within ambient conditions, which probably alloy or harm the wire isolation, has to be avoided.

If the product is potted in customer applications, the potting material might shrink during and after hardening. The product is exposed to the pressure of the potting material with the effect that the core, wire and termination is possibly damaged by this pressure and so the electrical as well as the mechanical characteristics are endangered to be affected. After the potting material is cured, the core, wire and termination of the product have to be checked if any reduced electrical or mechanical functions or destructions have occurred.

The responsibility for the applicability of customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply to customer specific products.

Cleaning agents that are used to clean the customer application might damage or change the characteristics of the component, body, pins or termination.

Direct mechanical impact to the product shall be prevented as the core material could flake or in the worst case it could break.

Product specific:

Follow all instructions mentioned in the data sheet, especially:

- •The soldering profile has to be complied with according to the technical reflow soldering specification, otherwise this will void the warranty.
- •All products shall be used before the end of the period of 12 months based on the product date code, if not a 100% solderability can't be ensured.
- Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty.

The general and product specific cautions comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable; however, no responsibility is assumed for inaccuracies or incompleteness.



				Projection ,		DESCRIPTION	
5.6	2015-05-18	SSt	ALa				
5.5	2014-09-16	SSt	ALa)]		WE-PD SMD Shielded Power Inductor	
5.4	2014-06-16	SSt	SSt	Würth Elektronik eiSos Gmbl	H & Co. KG		
5.3	2014-01-09	SSt	SSt	EMC & Inductive Solutions Max-Eyth-Str. 1			
5.2	2013-04-25	SSt	SSt	74638 Waldenburg		Order No.	
5.1	2013-02-20	SSt	ALa	Germany Tel. +49 (0) 79 42 945 - 0		ROHS&REACH WÜRTH ELEKTRONIK	
5.0	2004-10-11	MST	-	www.we-online.com eiSos@we-online.com		74477003 WÜRTH ELEKTRONIK	
REV	DATE	BY	CHECKED	CIOCOSSIVE GIIIIIG.COIII		Size: 1280	

J Important Notes:

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications.

In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.



6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered.

The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG.

Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

				_
5.6	2015-05-18	SSt	ALa	
5.5	2014-09-16	SSt	ALa	
5.4	2014-06-16	SSt	SSt	
5.3	2014-01-09	SSt	SSt	
5.2	2013-04-25	SSt	SSt	
5.1	2013-02-20	SSt	ALa	
5.0	2004-10-11	MST	-	
REV	DATE	BY	CHECKED	



Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com DESCRIPTION

WE-PD SMD Shielded Power Inductor

Order.- No.

74477003



SIZE A4

This electronic component has been designed and developed for usage in general electronic equipment only. This product is neasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use.
Moreover Würth Elektronik eiSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, ship control), transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.